



DOUBLE ACTING "RIGID" TRAFFIC DOOR



TRIPLE LAYER CONSTRUCTION

GS-HINGE ASSEMBLY

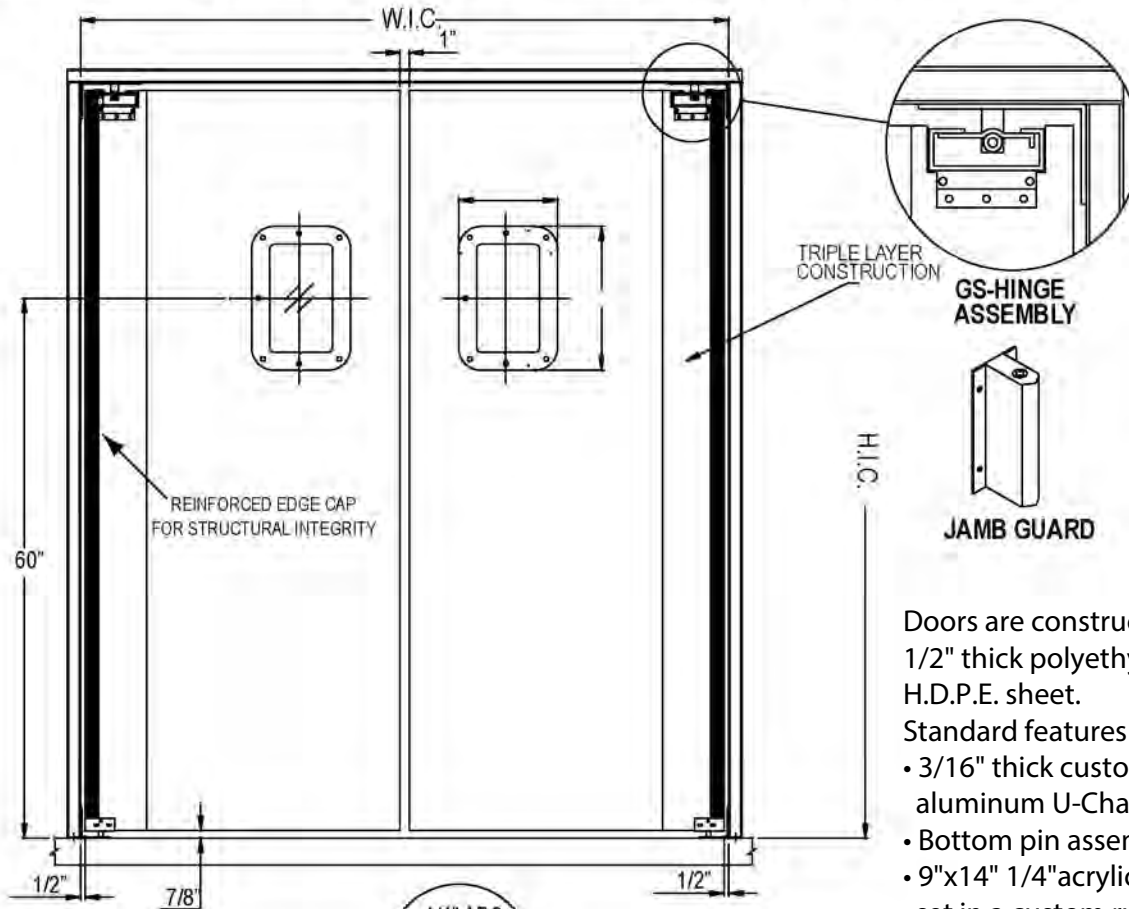

JAMB GUARD


Doors are constructed of a 1/2" thick polyethylene H.D.P.E. sheet.

Standard features are:

- 3/16" thick custom aluminum U-Channel
- Bottom pin assembly
- 9"x14" 1/4" acrylic window set in a custom rubber extrusion.
- GS type hinge.



1/4" ABS SHEET



BOTTOM PIN (STND.)



(OPTIONAL) PLASTIC IMPACT PLATES

*Cafe door on separate spec sheet.

UPDATED: 2/19/2024

National ACCESS DESIGN LLC
 513-351-3400 fax: 866-300-4539 sales@nationalaccessdesign.com
 NationalAccessDesign.com

DOOR SPECIFICATION
 Opening Width _____ x Height _____
 Qty. _____
 BI-PARTING SINGLE PANEL
 L R

STANDARD COLORS .250 ABS
 BLACK WHITE

IMPACT OPTIONS (BLACK ABS STANDARD)
 PL12" PL18" PL24"
 PL30" PL36" PL48"

WINDOW SIZES (ABS FRAMES)
 6"x12" 9"x14" (STANDARD)
 10"x30" 14"x16"
 22" x22"

HARDWARE OPTIONS
 BOTTOM PIN (STANDARD)
 SSGS HINGE W/ BOTTOM PIN
 JG-10 (10")

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____
 Date: _____

NAD-6000

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.