




DOUBLE-ACTING RIGID TRAFFIC DOOR

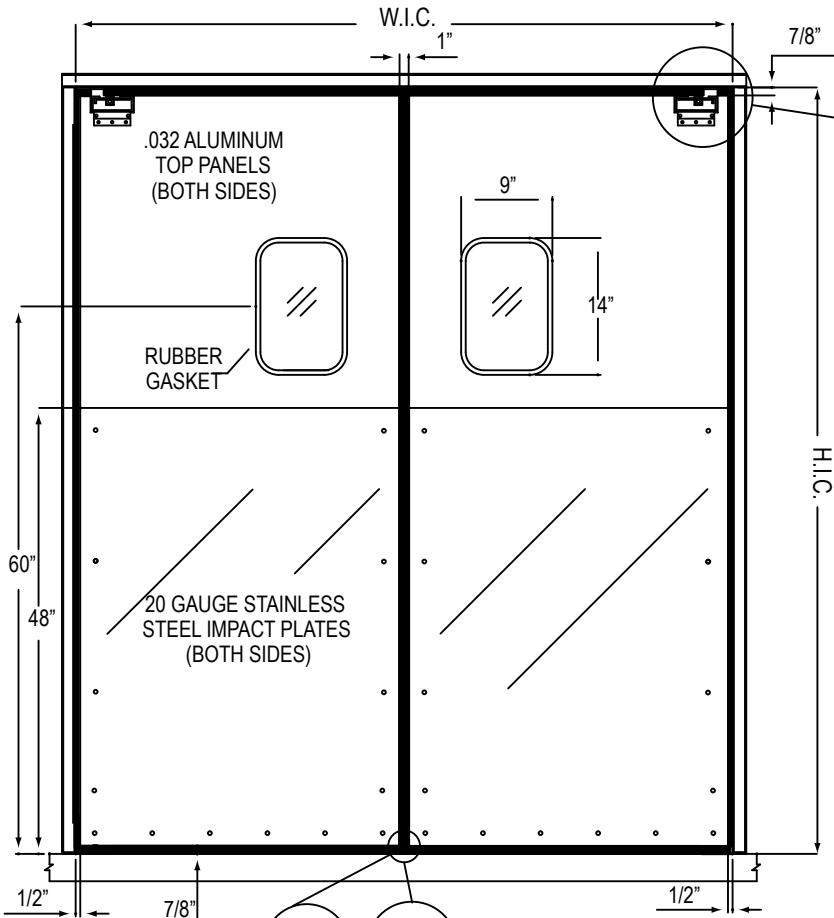

Doors to be constructed of a 3/4" exterior grade solid wood core, 1" total door thickness

- Top Panel:** .032" tempered aluminum alloy with satin anodized finish (both sides)
- Bottom Plate:** 48" high stainless steel
- Window:** 9" x 14" clear acrylic set in black rubber molding

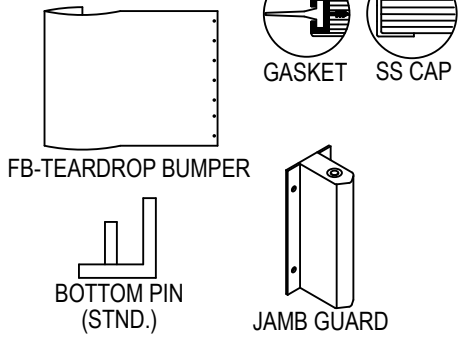

National ACCESS DESIGN LLC
 513•351•3400 fax: 866•300•4539
 sales@NationalAccessDesign.com

DOOR SPECIFICATIONS		
Opening Width _____ x Height _____		
Qty. _____		
BI-PARTING	SINGLE PANEL	
	L	R
TEARDROP BUMPER		
FB12"	FB18"	FB24"
FB30"	FB36"	FB42"
FB48"		
EDGE TRIM		
STAINLESS STEELCAPS - 9000ALC		
PVC (RIGID) - 9000ALC		
FULL GASKET- 9000ALCG		
WINDOW SIZE		
9"x14"	14"x16"	
22"x22"	10"x30"	
HARDWARE OPTIONS		
(STANDARD) GS HINGE W/ BOTTOM PIN		
GS HINGE W/ (OPTIONAL) 10" JG		
(OPTIONAL) STAINLESS STEEL GS HINGE W/ SS BOTTOM PIN		
(OPTIONAL) STAINLESS STEEL GS HINGE W 10" JG SS		

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD Model 9000ALC
JOB NAME/LOCATION
CUSTOMER/LOCATION
CUST. ORDER NO.
CUST. P.O. NO.