
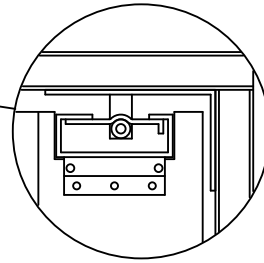



DOUBLE-ACTING RIGID TRAFFIC DOOR

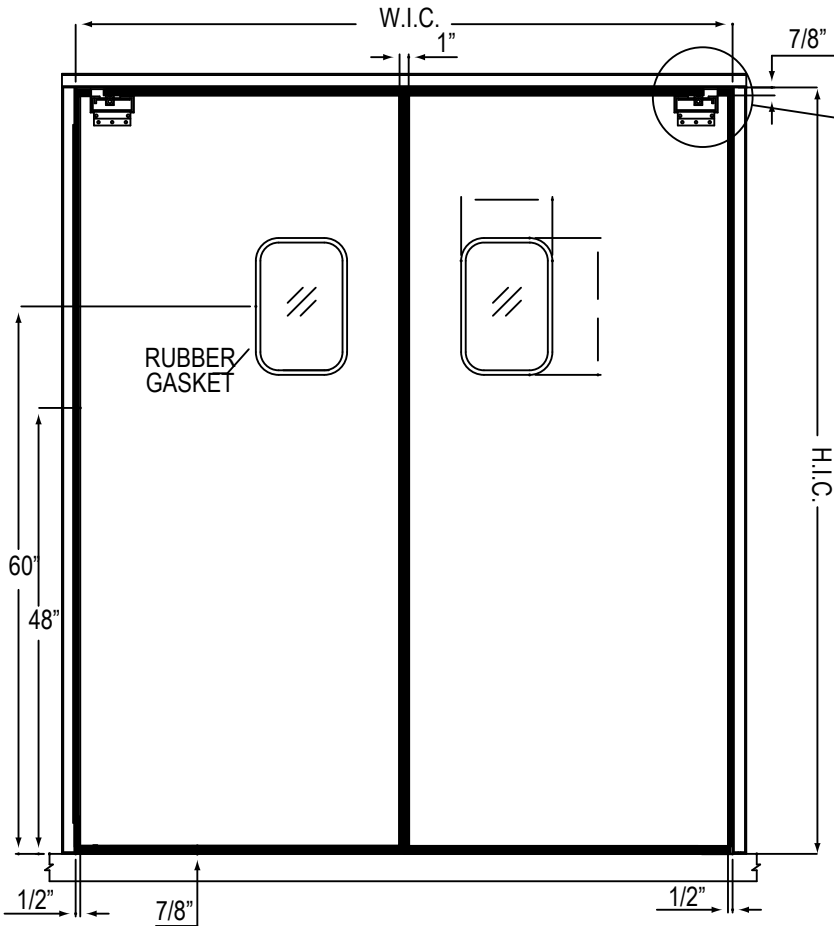


GS-HINGE ASSEMBLY

Doors to be constructed of a 3/4" exterior grade solid wood core, 1" total door thickness


- Panel: .032" tempered aluminum alloy with satin anodized finish (both sides)
- Window: 9" x 14" clear acrylic set in black rubber molding




FB-TEARDROP BUMPER



PL - IMPACT PLATE



BOTTOM PIN (STND.)



JAMB GUARD

National ACCESS DESIGN LLC
 513•351•3400 fax: 866•300•4539
 sales@NationalAccessDesign.com

DOOR SPECIFICATIONS		
Opening Width _____ x Height _____		
QTY. _____		
BI-PARTING	SINGLE PANEL	
	L	R
TEARDROP BUMPER		
FB12"	FB18"	FB24"
FB30"	FB36"	FB42"
FB48"		
IMPACT PLATES (STANDARD BLACK ABS)		
PL12"	PL18"	PL24"
PL30"	PL36"	PL42"
PL48"		
	STAINLESS STEEL	
EDGE TRIM		
PVC (STND)	STAINLESS STEEL EDGE CAP	FULL GASKET
WINDOW SIZE		
9"x14"	14"x16"	
22"x22"	10"x30"	
HARDWARE OPTIONS		
(STND) GS HINGE W/ BOTTOM PIN		
GS HINGE W/ (OPTIONAL) 10" JG		
GS HINGE W/ (OPTIONAL) 10" JG SS		
STAINLESS STEEL HARDWARE		

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD Model 9000A
JOB NAME/LOCATION
CUSTOMER/LOCATION
CUST. ORDER NO.
CUST. P.O. NO.